

POWERCHOCK 3

PORTABLE WHEEL RESTRAINT SYSTEM



PROTECT YOUR LOADING DOCK PERSONNEL

POWERCHOCK 3 is an easy-to-handle, manual wheel restraint system, highly suitable for narrow spaces between loading docks, with an unparalleled quality-price ratio.





EXCLUSIVE



WARRANTY

- RUGGED**
- RELIABLE**
- EASY-TO-HANDLE**



QUALITY & ROBUSTNESS



WINTER RESISTANT



LOWEST TCO



UNIVERSALLY COMPATIBLE



ALL GROUNDS & SPACES




RAPID & INTUITIVE

TECHNICAL SPECIFICATIONS

POWERCHOCK 3

- ◆ High-tensile steel wheel chock linked to a control box via communication cable installed on a flexible pole.
- ◆ Two sections (totalling 2400 mm) of hot-dip, galvanized steel and ground-fixed restraining plates in the dock bay area. Third section of restraining plate optional.
- ◆ 2 sensors linked to an audiovisual communication system:
 - Equipped with a wheel sensor inside chock to confirm proper wheel chock placement
 - A door sensor to confirm door closure
- ◆ Communication system equipped with an indoor control box, visual indicators (red/green LED lights), and an audible alarm. "Chock engaged" indicator light and self-diagnostic function included. Also equipped with exterior LED traffic lights and audible alarms.
- ◆ A trolley is available as option for easy handling by the driver.

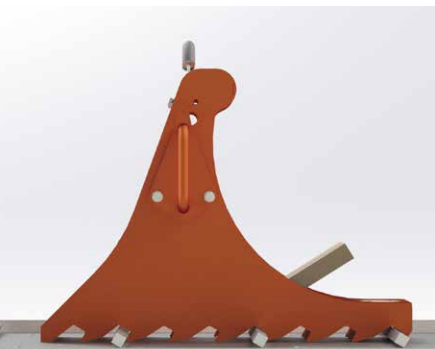

Height	40 cm
Length	54 cm
Width	15 cm
Weight	13 kg

Additional heights and widths available.



DETAILS AND VIDEOS AVAILABLE HERE.