


# POWERCHOCK **5**

ERGONOMIC WHEEL RESTRAINT SYSTEM



## PROTECT YOUR LOADING DOCK PERSONNEL

With the use of an ergonomic articulated arm, handling of the POWERCHOCK 5 wheel chock is actually effortless for all drivers.

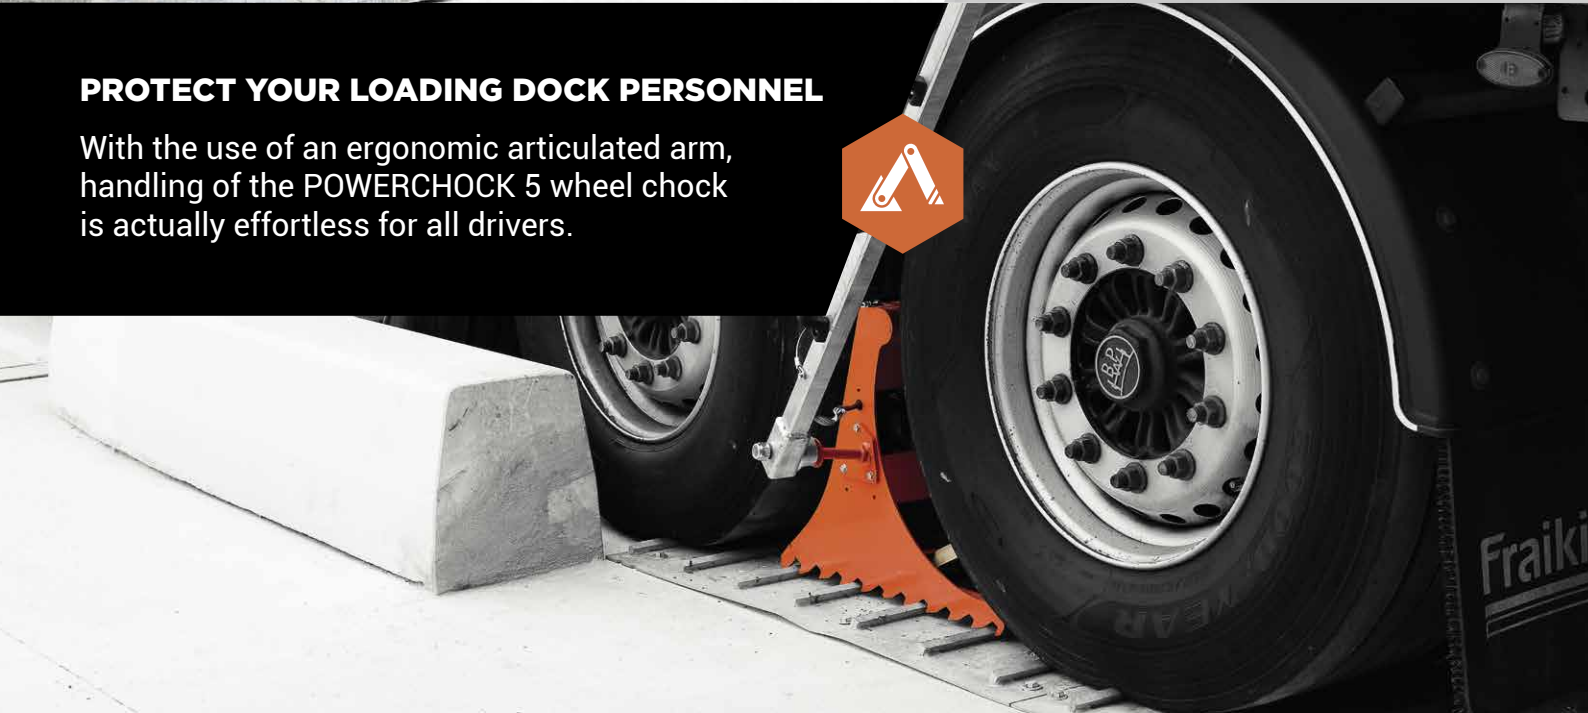



**EXCLUSIVE**



**WARRANTY**

- RUGGED**
- RELIABLE**
- EASY-TO-HANDLE**



**QUALITY & ROBUSTNESS**



**WINTER RESISTANT**



**LOWEST TCO**



**UNIVERSALLY COMPATIBLE**



**ALL GROUNDS & SPACES**




**RAPID & INTUITIVE**

## TECHNICAL SPECIFICATIONS

## POWERCHOCK 5

- ◆ High-tensile steel wheel chock installed on an ergonomic articulated arm.
- ◆ Two sections (totalling 2400 mm) of hot-dip, galvanized steel and ground-fixed restraining plates in the dock bay area. Additional section of restraining plate optional.
- ◆ 3 sensors linked to an audiovisual communication system:
  - Equipped with a wheel sensor inside the chock to confirm proper wheel chock placement
  - A door sensor to confirm door closure
  - A sensor to confirm return of arm into resting position on the wall
- ◆ Communication system equipped with an indoor control box, visual indicators (red/green LED lights), and audible alarm. "Chock engaged" indicator light and self-diagnostic function included. Also equipped with exterior LED traffic lights and audible alarms.

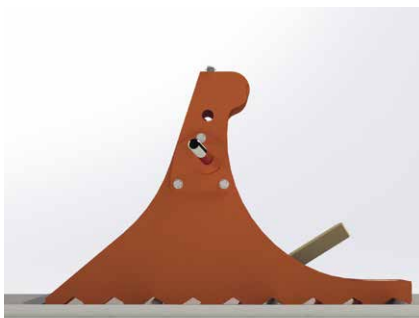

Height	40 cm
Length	61 cm
Width	20 cm
Lifting Effort	10 kg
Weight	17 kg

Additional heights and widths available.

DETAILS AND VIDEOS AVAILABLE HERE.

